


PU-514L-WPRX New Product

HDBase™ LITE Wall Plate Receiver with 2-way IR (up to 60m)




The PU-514L-WPRX is a wall plate receiver unit designed to be used with PU-514L-TX Transmitter, and any compatible HDBase™ Matrix or Distribution Amplifier. It allows uncompressed HDMI, and 2-way IR signals to be received via a Single CAT5e/6/7 cable to distances of up to 60m. Utilise the USB power output from a TV as an optional way of powering the PU-514L-WPRX receiver unit alternative to a mains power supply.

Compatible devices: PU-514L-TX / PU-44XL-KIT / PU-4H4HBT / PU-8H8HBT / PU-8H8HBT / PU-8H8HBT

NOTE: Specific feature compatibility may vary dependent on the transmission device.

FEATURES

- HDMI 1.4 with 3D, 4Kx2K support, HDCP and DVI compliant
- Supports HDMI 1.4 (including HDCP) over a single CAT5e/6/7 up to 60m
- Complies with HDBase™ Lite specifications
- Full HD resolution support (1080p@60Hz/36-bit), 3D over 60m, 4Kx2K over 40m and PC resolution support (VGA to WUXGA) over CAT5e/6 cable
- Supports HDMI output up to 15m with 8/12-bit deep colour
- Supports 2-way IR Control
- Supports High Definition LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission
- Choose to power the PU-514L-RX via the USB output from a TV (Cable available separately - APC-USB): * Please note the performance and consistency of USB power outputs from TVs can vary and cannot be guaranteed by CYP.

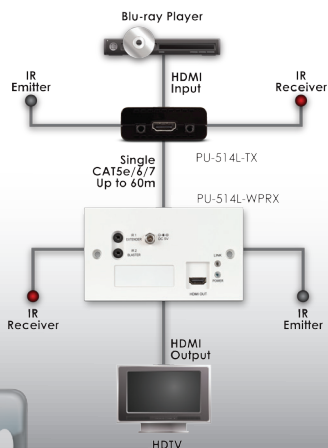

SPECIFICATIONS

Input:	1x RJ45 (1x HDMI & Propriety Data) 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
Power:	5V/2.6A DC PSU (US/EU standards, CE/FCC/UL certified)
Dimensions:	145mm (W) x 40mm (D) x 85mm (H)
Gross Weight:	600g
Net. Weight:	160g
Packaging:	Boxed

