

PU-Q1H4C


1 to 4 HDMI to CAT5e/6 Splitter



The PU-Q1H4C has 1 HDMI input and 3 CAT5e/6 transmitter outputs with 1 HDMI output allowing HDMI signals to be transmitted over CAT up to 40m. This device requires the CAT outputs to be connected to the PU-1106RX Receiver units. The PU-Q products within the PUMA range combine HDMI over CAT5e/6 (PUMA) & HDMI distribution (QUANTUM) to provide versatility to HDMI installations.

FEATURES

- v1.3 HDMI, HDCP 1.1 and DVI 1.0 compliant
- 1 to 4 HDMI to CAT5e/6 splitter
- Resolutions supported: PC - VGA to UXGA; HDTV - 480i to 1080p plus 1080p24fps
- High Definition Audio supported: Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio plus LPCM
- CAT I/O can run up to 40m @ 1080p8bit video. HDMI Output can run up to 15m
- Selectable EDID settings - TV (downstream) and STD (fixed)
- Supports 'Deep Colour' (10 & 12 bit)
- IR extender I/O
- System reset function switch generate a command every 10 minutes to the connected display which resets them to the correct HDMI input
- CAT output is ideal for cascading to other HDMI products within the PUMA range
- Supports xvYCC
- Supports 3D signals

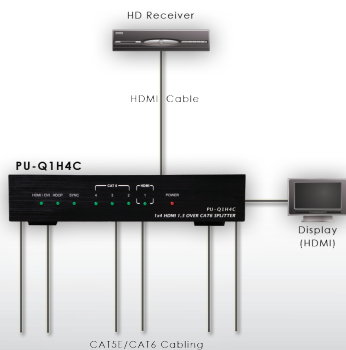

Cascade CAT5e/CAT6 outputs, connect to any CAT5e/CAT6 Receiver based Puma product.

SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x Stereo mini-jack (1x Infrared Receiver)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x Stereo mini-jack (1x Infrared Emitter), 6x RJ45 (3x HDMI & Proprietary Data)
Power:	5V/3A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	215mm (W) x 134mm (D) x 48mm (H)
Gross Weight:	900g
Net. Weight:	700g
Packaging:	Boxed

