

5Play™ HDBaseT™ Receiver with integrated video scaling & audio breakout (inc. PoC & single LAN, up to 100m) - stereo audio only




5Play™ **HDBT**™ **HDMI**™
BASE HIGH-DEFINITION MULTIMEDIA INTERFACE

The PU-507RX-SCD Receiver allows uncompressed HDMI signals and IP data to be received over a Single CAT5e/6/7 cable. This device features full 5Play™ convergence allowing the distribution of Video, Audio, LAN serving, Power over Cable (PoC), RS-232 and 2-way IR control functionality over the same CAT5e/6/7 cable. These combined HDMI and control signals can be transmitted up to lengths of 100 metres. This receiver also features an on-board scaler with audio breakout enabling the installer to maximise video resolution support to the display whilst de-embedding stereo audio via an optical connection within the zone.

FEATURES

- Supports all v1.3 HDMI resolutions
- Supports uncompressed video/audio up to 10.2Gbps
- Video scaling ensuring maximum compatibility and optimum video resolution support.
- Supports Audio breakout via Optical output: Note: This device supports stereo audio input/output only.
- Supports resolutions VGA~WUXGA, 480i~1080p, dependent upon the output display's EDID settings
- HDMI, HDCP, & DVI compliant
- Supports HDCP repeating and CEC functions
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- Uncompressed video 1080p, 60Hz, 48bits
- 5Play™ convergence: HDMI, LAN, PoC & Control (IR & RS232)
- Supports 3D signals

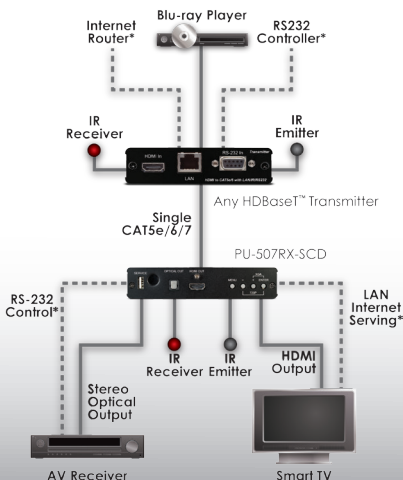

*If available on transmitter

SPECIFICATIONS

Input:	1x RJ45 (1x HDBaseT HDMI & Proprietary Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver), 1x RJ45 (1x LAN Serving)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter), 1x 9pin Dsub (1x RS-232 Data), 1x Toslink (1x Optical 2 Channel LPCM)
Power:	24V/2.7A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	145mm (W) x 200mm (D) x 35mm (H)
Gross Weight:	1240g
Net. Weight:	600g
Packaging:	Boxed

